

Westfield Select IP67 High Density D-Sub 3 Row Front Panel Mount Connectors

IP67 High Density 3 Row D-Sub Male Panel Mount - Solder Bucket Type


Front Panel Mount High Density Male

Locking via 440unc screws

Straight Solder Bucket Type

Gold Flash Plating: Others Available

We can attach custom cables if req'd

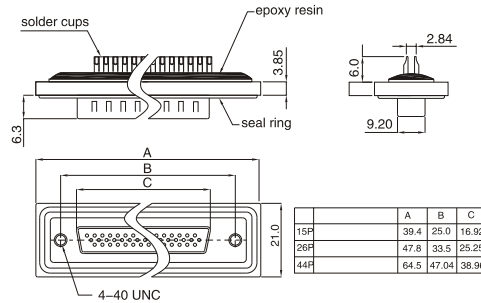

General information

Ambient temperature:	-25 °C ~ + 70 °C
Connector insert:	PBT+GF
Connector contacts:	Brass gold plated
Coupling nut/screw:	Brass nickel plated
Seal / O-ring:	FKM

Insulation resistance:	≥ 1000MΩ
Forward resistance :	≤ 10mΩ
Shielding:	Unavailable
IP rating:	IP 67 in locked condition

Part Numbers:

15way High Density 3 Row P/N: IP67HDDSUB15MSNS

26way High Density 3 Row P/N: IP67HDDSUB26MSNS

44way High Density 3 Row P/N: IP67HDDSUB44MSNS

Electrical data & Mechanical data

Contacts	Contacts	Rated current	Voltage	
			A/C	D/C
D-Sub 15P	Solder version	5A	300V	300V
D-Sub 26P	Solder version	5A	300V	300V
D-Sub 44P	Solder version	5A	300V	300V

Remarks

For Specific Gold Plating Options + Mating Cycle Requirements Please Contact Sales Office

Competitors Products Cross Reference Service Available