


# Westfield Select Cables - IP67 Mini Din Female Cable Assemblies

## IP67 Mini-Din Female Molded Cable

Customer to Specify Cable Length and Connector / Termination on Free end.

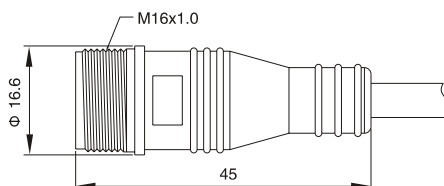

### General information

Ambient temperature:	-20 °C ~ + 80 °C
Connector insert:	PBT
Connector contacts:	Brass with silver plated
Connector overmold:	TPU
Coupling nut/screw:	PA + GF

Insulation resistance:	≥ 20MΩ
Contact resistance :	≤ 20mΩ
Shielding:	Available
IP rating:	IP 67 in locked condition

Westfield Part Number IP67MDINFST\*\*CA-XXXX

\*\* refers to pins number  
X refers to cable specification

### Electrical data & Mechanical data

Contacts	Rated current	Voltage		Wire gauge / size		Cable jacket	Wire insulation	Cable ending & length
		A/C	D/C	AWG	mm <sup>2</sup>			
03 pins	1.5A	300V	300V	24AWG	0.25	PUR / PVC	PVC	
04 pins	1.5A	300V	300V	24AWG	0.25	PUR / PVC	PVC	
05 pins	1.5A	300V	300V	24AWG	0.25	PUR / PVC	PVC	
06 pins	1.5A	300V	300V	24AWG	0.25	PUR / PVC	PVC	Customized cable ending and length
07 pins	1.5A	300V	300V	24AWG	0.25	PUR / PVC	PVC	
08 pins	1.5A	300V	300V	24AWG	0.25	PUR / PVC	PVC	
09 pins	1.5A	300V	300V	24AWG	0.25	PUR / PVC	PVC	