

Apfel DIN41612 Connectors

DIN 41612 EUROCARD CONNECTORS

APFEL

PRESS-FIT TERMINATION CONNECTORS


APFEL provides the unique patented compliant twin-eye of the needle press-in terminations.

It owns the following advantages:

- Tapered entry.
- Gas tight and larger contact area with the wall of the plated through hole.
- Conform to the hole variance.


PATENTED CONSTRUCTION

Fig 1

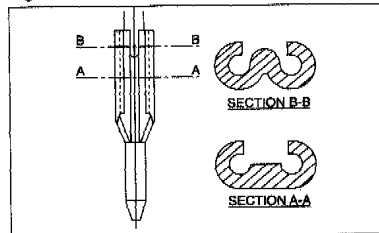

Construction of female short press-fit contact
5mm tail length

Fig 2

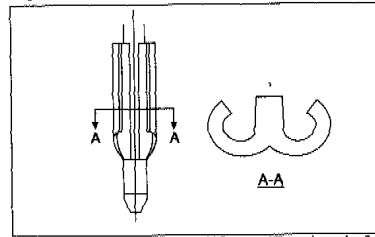

Construction of long post (13mm, 17mm) male &
female connectors, male press-fit 5mm tail length

Diameter of P.C.B plated through hole:
P.C. board thickness:
Recommended P.C. board holes:
Copper plating:
Tin plating:
Push-in force per pin for plated through hole:
Push-out force per pin for plated through hole:

$\varnothing=0.94-1.09\text{mm}(0.037-0.43\text{inch})$
 $\geq 1.6\text{mm}(0.062\text{inch})$
hole $1.15^{\pm 0.02}\text{mm}(0.0453^{\pm 0.0008}\text{inch})$
25-50 μm (0.001 inch min.)
5-15 μm (0.002 inch min.)
max 8kg/pin (17.5 lbs/pin)
min. 3.5kg/pin(7.5lbs/pin)

Fig 3



Cross section of an assembled P.C. Board,

Fig 4



Westfield Distribution Ltd

(E&OE)

TEL: +44(0)1488 685183

E-mail: sales@westfielduk.com

FAX: +44(0)1488 685430

Disclaimer - Due to technical progress, all designs, specifications, data sheets and components are subject to change without notice. All product information contained in this catalogue / data sheet is for information only - NOT SPECIFICATION.

Please call / fax / e-mail for samples and full engineering drawings. Certificates of conformance issued if required. .