


# Telecom Connectors

## 56 SERIES - SIDE ENTRY LED PCB JACK <8P>

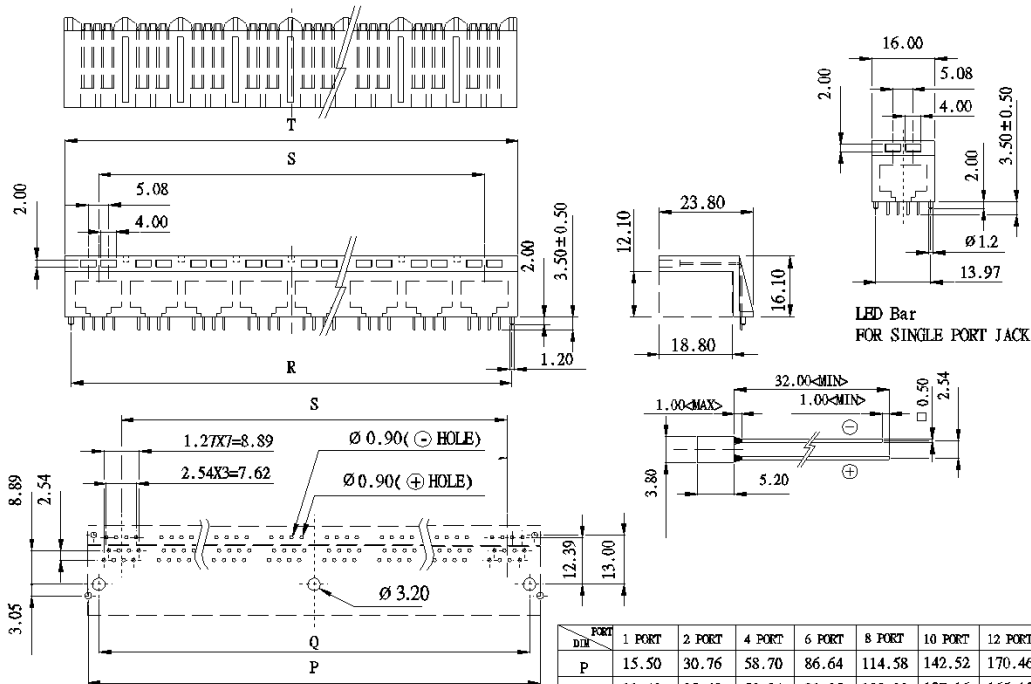

PC Board Layout

### Technical Data

Housing &  
 LED Bar :Glass Filled Polyester UL94V-0  
 Standard Colour : Black  
 Insert :Glass Filled Polyester UL94V-0  
 Shield :0.25mm Brass Nickel Plated

Contact : 0.46mm Diameter Phosphor Bronze  
 Gold Plating Over Nickel Or  
 0.35mm (0.014") Thickness  
 Phosphor Bronze Alloy Selective  
 Gold Plating Over Nickel Over Tin

DIM	1 PORT	2 PORT	4 PORT	6 PORT	8 PORT	10 PORT	12 PORT
P	15.50	30.76	58.70	86.64	114.58	142.52	170.46
Q	11.43	25.40	53.34	81.25	109.22	137.16	165.10
R	13.97	27.94	55.88	83.82	111.76	139.70	167.64
S	—	13.97	41.91	69.85	97.79	125.73	153.67
T	16.00	31.01	58.95	86.89	114.83	142.77	170.71

### Ordering Information

E 56 0 - E 0

Series Number

No. Of Positions

No. Of Contacts (4,8)

Gold Plating:  
 1-GF 2-6u" 3-15u"  
 4-30u" 5-50u" 6-Pd20u"

Contact: 6- Round Pin  
 8- Stamped Pin

No. Of Port  
 0- 1 Port A- 2 Ports  
 C- 4 Ports E- 6 Ports  
 G- 8 Ports

Type Of Shield

LED Front View:  
 Right Side / Left Side  
 5- Red Green  
 8- Yellow Green  
 9- Red Yellow

Westfield Electronics

TEL: +44 1488 685183 [www.westfielduk.com](http://www.westfielduk.com) FAX: +44 1488 685430  
 Unit 2, Station Yard, Station Road, Hungerford, Berkshire, RG17 ODY  
 United Kingdom E-mail: [sales@westfielduk.com](mailto:sales@westfielduk.com)

Please note: due to technical progress, all designs, specifications, data sheets & components are subject to change without notice. All product information contained in this catalogue / data sheet is for information only – not specification. Pls call/ fax / e mail for samples & full engineering drawings, Certificates of conformance issued if required. E&OE.